

StormPit®

SURFACE WATER SUMPS

Built for Compliance.

StormPit Type One

**THE APD STORMPIT TYPE ONE HAS IT
ALL PLUS MORE!**

Don't be fooled by non-compliant sumps and ensure you are complying to 'NZ Building Code E1 Surface Water' by installing the APD StormPit Type One sump today.

**EASIER!
FASTER!
IMPROVED!**


NZBC E1 TYPE ONE COMPLIANT SUMPS ARE REQUIRED TO HAVE

- 300mm opening
- Maximum 1000mm height
- 375mm diameter
- Removable access cap for cleaning
- A submerged or trapped outlet
- 300mm minimum at base for silt settlement
- Minimum 90mm outlet pipe

APD's StormPit Type One offers more than just compliance to NZBC E1, we have designed additional features to benefit the installer onsite and ensure the long-term trouble-free use.

ADDITIONAL FEATURES

- Cast iron grate fits into the main body for shallow depth installations
- Adjustable in height from 171mm – 445mm from top of outlet pipe to finished ground level
- 5 tonne rated cast iron grate
- 274mm of height adjustment
- 3 x Moulded inlet connections sized for 100mm PVC
- Full 100mm sized outlet with oversized trap for greater flow
- Anti-floatation ring
- No threads that can bind up with gravels and fines
- Easy to remove access cap

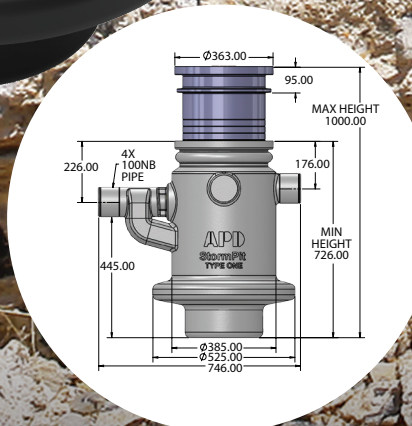

For more information contact
your APD account manager
or call (09) 263 7741

www.apd.co.nz



IDEAL TANK & SYSTEM SOLUTIONS

StormPit®

SURFACE WATER SUMPS

Built for Compliance.

If larger sumps need to meet NZBC E1 then why not make sure your smaller sumps meet the same requirements.

StormPit 250


THE APD STORMPIT 250 HAS IT ALL PLUS MORE!

APD's StormPit 250 has been designed with multiple features to benefit the installer onsite and ensure the long-term trouble-free use.

ADDITIONAL FEATURES

- Cast iron grate fits into the main body for shallow depth installations
- Adjustable in height from 132mm – 392mm from top of outlet pipe to finished ground level
- 1 tonne rated cast iron grate
- 260mm of height adjustment
- 1 x Moulded inlet connection sized for 100mm PVC
- Full 100mm sized outlet with oversized trap for greater flow
- Anti-floatation ring
- No threads that can bind up with gravels and fines
- Easy to remove access cap

**LIKE ITS BIG
BROTHER, OUR
250MM VERSION IS
EASIER!
FASTER!
IMPROVED!**

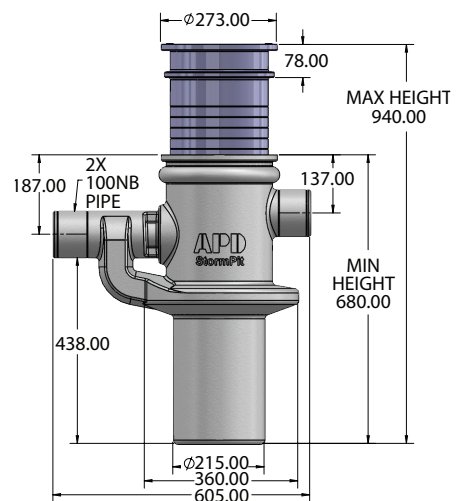

For more information contact
your APD account manager
or call (09) 263 7741

www.apd.co.nz

APD

IDEAL TANK & SYSTEM SOLUTIONS