



It's easy to find your ideal tank solution at APD.

Make finding your tank requirements easy, by making use of APD's helpful technical support. By asking about your specific needs, we'll find the solution that's perfect just for you. APD's range of Tank and System solutions for above and below grounds will ensure whatever your requirement, whether it's for Stormwater Detention, Rainwater Harvesting or Chemical Storage and Bunding, you can be sure you'll find exactly what you need right here.

CALL APD, AND FIND YOUR IDEAL TANK SOLUTION NOW ON (09) 263 7741.

CONTENTS

StormLite Underground Cylindrical Tanks	4-5
StormLite Installation	6
StormLite Above Ground Rectangular Tanks	7
StormLite ³ Underground Rectangular Tanks	8-9
StormSlim® Above Ground Tanks	10-11
StormSlab Tanks	12-13
RainWorx Rain Harvesting Systems	14-15
Above Ground Cylindrical Tanks	16
WasteWorx Pump Station	17-18
StormPit Surface Water Sumps	19-22
StormPit Bubble Up Chamber	23

THE APD PRODUCT RANGE INCLUDES:

- Underground Water Retention/ Detention Systems
- Above Ground Water Retention/ Detention Systems
- Rain Harvesting Systems
- Chemical Storage Tanks
- Open Top Process Tanks

- Surface Water Sumps and Bubble Up Chambers
- Boat and RV Tanks
- HVAC Ducting suitable for chemical applications and council swimming pool environments
- Piping Systems for chemical, water and waste water plants



Our 1200
diameter tanks are
made from a potable
grade polyethylene, which
means they can be
used for drinking
water.

EASY INSTALLATION

All APD StormLite tanks come with a full fittings kit-set consisting of three wallace seals, end cap and leaf trap mesh. The engineered riser shape with flat back panel ensures simple installation of the wallace seals and our lightweight robust design means that APD tanks are easily and safely lifted into place with a digger on site.

CHOOSE FROM FOUR DIAMETER OPTIONS

APD provides tanks in 1200mm, 1000mm, 800mm and 645mm to suit your site depth requirements.

DON'T PAY FOR EXTRA VOLUME YOU DON'T NEED

All APD StormLite tanks are assembled to the exact volume required and delivered within 2-5 days to site by hiab truck.

TANK ACCESSORIES



Garden Lid



Adjustment ring for driveway or concrete install



Standard 100mm fittings kit (150mm available on request)

THE ECONOMICAL CHOICE, MADE LIGHT AND STRONG

At around 250 kilograms, a 5000 litre StormLite® water tank is a mere fraction of the weight of concrete tanks. This means it can be moved around site with only a small digger. Designed strong, StormLite can go under driveways, carparks, and grass. Tell us your volume requirement, and our make-to-order service will ensure your StormLite tank adheres to council regulations, while making your drainlayer's job a breeze. Make the affordable choice, with made to order economy. Call APD now on (09) 263 7741.



TANKS THAT LAST

StormLite tanks are made from tough polyethylene corrugated pipe which won't corrode and can be recycled.

APD also provides StormLite tanks with a 10 year guarantee* and 50 year design life.

*10 year guarantee subject to APD Terms and Conditions of Trade.

OUT OF SIGHT

Save precious outdoor space on your section and eliminate the intrusive visual impact of an above ground tank. StormLite tanks are buried out of sight and can be installed under driveways, gardens or lawns.

HAMMERHEAD DESIGN

APD's unique hammerhead design with built in silt trap eliminates the cost associated with the installation of a separate silt trap and ensures 100% of the tank capacity can be utilised, avoiding the need for a larger tank. Connections can also be made into the opposite end of the tank if needed.

We can also provide pre-welded spigots to join multiple tanks together and spigots for larger pipe connections.

TANK ACCESSORIES



Optional pre-welded connecting and joining spigots



Optional Anti-Buoyancy Ground Anchors



Made to Order Economy.

RESIDENTIAL LAWN INSTALLATION

Standard Cover:

150mm Compacted Hard Fill + 200mm Soil = 350mm Total

- For 1200 diameter tanks, the riser can be cut down to suit finished ground level.
- Ground Anchors: If your site requires less than 350mm cover and/or has a high water table please contact APD.

Detailed engineering drawings are available on request from APD.





DRIVEWAY INSTALLATION


Cover Requirements:

Compacted Hard Fill + Concrete Thickness = 350mm Min Total Cover 200mm Thick Reinforced Concrete Over Tank - Residential Driveway 250mm Thick Reinforced Concrete Over Tank - Commercial Driveway

- For 1200 diameter tanks, the riser can be cut down to suit finished ground level.
- Ground Anchors: If your site requires less than 350mm cover and/or has a high water table please contact APD.

Detailed engineering drawings are available on request from APD.



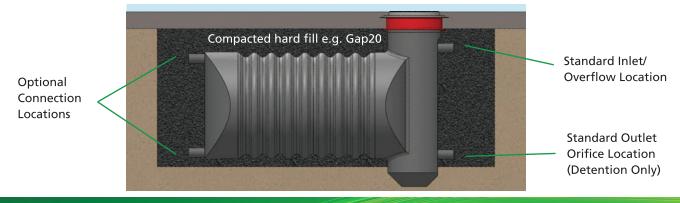

StormLite® Rectangular

ABOVE GROUND DETENTION/RETENTION TANKS

Above ground Rectangular tanks are available from APD for those projects where standard detention tanks just won't work. Great for placing under houses and decks, these tanks can be custom made to fit between piles and structural supports.

DIMENSIONS

Standard height is up to 800mm. Both the width and length of our rectangular tanks can be sized to suit the site requirements.



SIMPLE INSTALLATION

No ground excavation is required other than levelling and compacting the area where the tank is to be sited, assuming site soil meets the requirements of NZS3604:2011 classification of 'Good Ground'.

OPTIONS

APD offers a choice of lid types to suit installation. There is also an optional addition of silt traps and optional re-positioning of a man way.

We can also include access and risers if required.

See below for examples.

SPECIALIST DESIGN THAT LASTS

The APD rectangular StormLite tank was specifically engineered by our in-house team based on international standards for fabricated tanks.

Made from heavy duty polyethylene sheet, with internal baffles for added strength and support, the tank has been optimised to provide a robust solution.

OPTIONS

1. Standard man way position



2. Optional man way position



3. Silt trap and custom lid





Modular Strength that Fits.

When you need underground stormwater detention or retention but are constrained by:

- Limited vertical depth to stormwater discharge point.
- Requirement for deep burial (up to 2m cover).
- Limited space that needs to store a large volume of water.

Our newest Tank Solution StormLite³ does it all with its unique APD design.

TRAFFICABLE

Designed to support loads up to 28 tonnes/sqm.

Solutions strong enough to support up to 2m of ground cover and/or withstand heavy traffic loads, so long as the overall 28 tonnes/sqm load limit is not exceeded.

PROTECTIVE EXTERIOR SHELL FOR A SOLUTION THAT LASTS

As New Zealand's leading plastic tank fabricators we know what it takes to make a robust tank shell.

We've combined our expertise and high quality materials to produce a 6mm thick shell that securely holds the modular tank elements together and is over 7x the thickness of the protective layer used by other modular systems. Every weld on every tank is leak tested during production.



CONNECTING SPIGOTS & INSPECTION PORTS

Standard with all StormLite³ tanks are a tank connection spigot and a vent spigot for connection of the tank to a manhole chamber as shown in the illustration on the right.

Add on options are:

- Additional connection spigots at standard pipe diameters up to 300mm (315mm OD).
- Inspection ports up to 150mm diameter (160mm OD).
- Bore pumps and access ports up to 150mm diameter.

MODULAR SOLUTIONS, FOR WHEN IT HAS TO FIT

When your retention or detention tank has to fit underground, either very deep, in a shallow space, and/or for vehicles to drive over, APD's NEW StormLite³ has your ideal solution. Its unique modular rectangular system is extremely durable and watertight, using the same reliable 6mm polyethylene sheet that is used on hazardous-rated chemical tanks. Installation has never been this easy, arriving on-site complete and ready-to-go. All you have to do is specify your requirements, then fill-in over the top of the highly durable delivered tank.


ARRIVES PRE-ASSEMBLED

So it can be installed quickly and safely. Our StormLite³ tank is delivered complete with spigots for an inlet and vent pipe ready to connect to a manhole.

Tanks are supplied standard with lifting lugs, to simplify handling on site.

Fast installation saves costly additional man hours on site, keeping the time spent in the excavation site to a minimum; making for a safer and efficient work environment.

StormLite³ was developed because we were approached repeatedly by Engineers and Drainage Contractors for low vertical profile tanks, to be buried at depths greater than 1 metre and tanks to maximise volume storage in limited spaces.

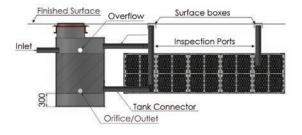

CONFIGURATION OPTIONS

Minimum Tank Height: 458mm (1 Module)
Maximum Tank Height: 2150mm (5 Modules)
Maximum Buried Depth: 3m from base of tank

Maximum Cover Over Top of Tank: 2m Maximum Tank Width: Approx. 4500mm

(Requires Special Transport)

Maximum Tank Length is dependent on the height and width. Please contact APD for advice.

Minimum Cover to Finished Ground Level:

Grass Install: 300mm

Driveway/Trafficable Install: 600mm

MANHOLE CHAMBER AND SILT TRAP FOR DRAINAGE


The StormLite³ tank must be connected to a manhole chamber as per the diagram, to limit silt intake into the tank and as a connection point for all inlets, overflow and orifice/outlet.


MODULAR TANKS

Modular tanks that fit any environment and give you the flexibility you need.

The internal structure of StormLite³ is composed of ProTank modules, arranged to utilise space effectively, fitting your volume requirements and site layout.

ProTank modules lock together vertically, up to 5 high, and pack together horizontally to form the shape of the tank.



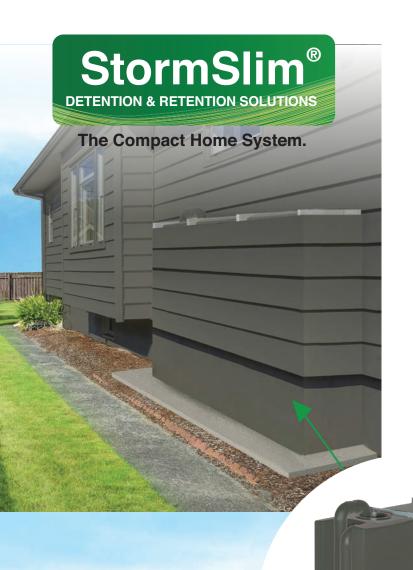



THE APD STORMSLIM® SYSTEM IS THE PERFECT ABOVE GROUND TANK OPTION FOR COMPACT SPACES!

StormSlim® is an innovative stormwater detention and retention system designed to manage your rainwater and stormwater when outdoor space is at a premium. StormSlim®'s compact dimensions and height means you can maximise the use of the outdoor space available without the visual impact of unsightly tanks. Designed to effortlessly and elegantly fit in with the exterior of your home whether retrofitting or a new build.

COLOURS IN STOCK







89 817 Slate Light Grey Grey



Beige

206 Mist

Green



ADDITIONAL COLOURS ARE AVAILABLE, MADE TO ORDER. STANDARD LEAD TIMES AND CHARGES APPLY. PLEASE CONTACT US TO FIND OUT MORE.

CHOOSE FROM A RANGE OF COLOURS!

DESIGNED TO SUIT YOUR HOME


APD's StormSlim® tanks come in a variety of designer colours to perfectly match or complement your home. Whether you choose to match the tank colour to your house or fence, or opt for a bright pop of colour as a design feature, there's a colour option to suit.



Prefer to conceal your tank? APD's StormSlim® tanks can be housed in cladding or fencing by simply fixing framework to the galvanised support frames. Ask us about our optional framing kit to allow concealing the ends of the tank. The 2000, 3000, and 5000 litre StormSlim® tanks also come with a recessed end to help conceal the pipework.



- New modular sizing minimises foot print.
- Multiple tank sizes to suit any design, including 1000, 2000, 3000, and 5000 litre options.
- PS1 for engineered residential slab designs available.
- All tanks are 1800mm high to match standard fence requirements.
- Manufactured to AS/NZS 4766:2020 from water tank grade PE material suitable for potable water.
- Designed and made in New Zealand for local conditions.
- Compatible with APD RainWorx systems and pumps.
- Engineered to meet the seismic requirements of Zone 1, soil type D.

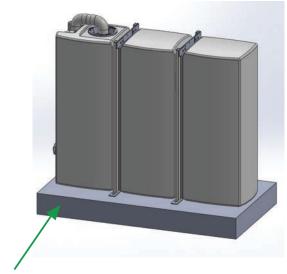

Seismic base slab



Framing kit





Tank Size	Height (mm)	Width (mm)	Length (mm)	Slab Width (mm)	Slab Depth (mm)	Slab Length (mm)
1000 Litre	1800	360	2285	790	150	2400
2000 Litre	1800	640	2285	1073	200	2400
3000 Litre	1800	640	3400	1073	200	3500
5000 Litre	1800	1000	3400	1433	200	3500



StormSlab




Underfloor Peace of Mind.

THE APD STORMSLAB IS A VERSATILE SYSTEM FOR RESTRICTIVE SITES!

StormSlab is an innovative stormwater detention and retention system designed to manage rainwater and stormwater when site restrictions mean that our market-leading StormLite underground detention and retention solutions cannot be used. These restrictions are usually due to a lack of space and/or insufficient fall to the public stormwater system on the site.





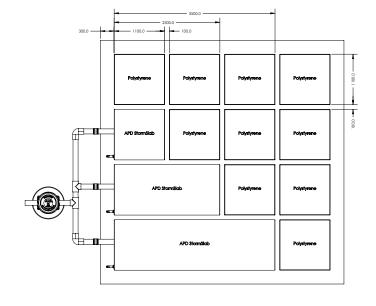


COMPATIBLE WITH APD'S RANGE OF SOLUTIONS


Our StormSlab system can be coupled with the APD RainWorx rain harvesting below ground application for water reuse, while the APD StormSlab Distribution Chamber can also be used as a pump station (including three wallace seals, a 100mm PVC cap, and mesh).


FEATURES:

- No connections between StormSlabs under the slab.
- Multiple StormSlab sizes to suit any site or design.
- PS1 for engineered residential slab designs available.
- All StormSlabs are 1100mm wide to match standard pod configurations.
- Manufactured from water tank grade PE material suitable for below ground installation.
- Designed and made in New Zealand for local conditions.
- 300mm deep for extra storage.

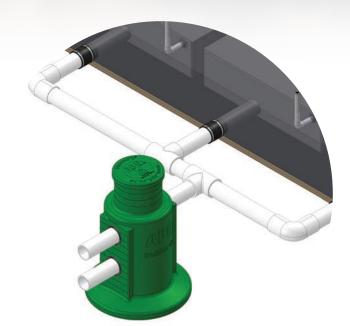

APD StormSlab Distribution Chamber

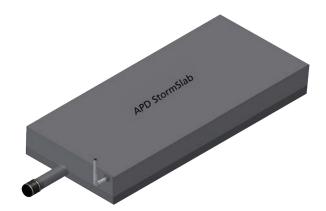

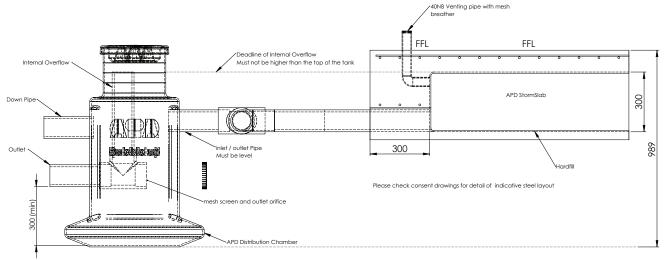



The Easy, Complete System.

THE RAINWORX® RANGE GIVES YOU:

Complete package: Along with the StormLite tank we supply the pumps, controllers, pipe work and covers ready to connect to your plumbing and to integrate with the public water supply.

Quality parts: We are NZ's leading plastic tank fabricators, providing the highest quality products. All our StormLite tanks come with a design life of 50 years and our quality tank design offers long term peace of mind with maximised service life for all parts.

Flexible options: Every household's needs are unique and because our tanks are made to order you can have the right set up tailored for you. You only pay for what you need.



Efficient and intelligent system: APD RainWorx Systems automatically switch to mains pressure water if the retention tank is empty or if mains power fails. Our unique tank design means 100% of the tank capacity is used while still meeting council requirements.

Ready when you want it: Made to order in just 2-5 days.

RAINWORX FOR STORMLITE UNDERGROUND TANKS

Whether you have a modern urban home or a classic villa, whatever your needs, we have the right solution for you. APD RainWorx systems for StormLite underground tanks include pre-fitted internal pipework and pump platform, plus submersible pump and wall mounted RainWorx cabinet.

APD's exclusive tank design comes with:

- Pre-fitted internal pipework Avoiding the hassle and Health & Safety risks of trademen entering confined spaces for installation.
- Pump platform Prevents the pump from sitting in the silt trap to ensure only clean water is pumped into the house.

THE IDEAL RAIN HARVESTING SOLUTION IS EASY

You'll never run out of water, using APD's smart RainWorx system. It automatically switches to mains supply once storage levels become low enough, or when there is a power cut. This unique system comes in a ready-to-go package, with options to suit above and below ground tanks, we'll even provide a template for the plumber and electrician for a simple installation. Start using free water. **Get the easy, complete system from APD now on (09) 263 7741.**

INSTALLING A STORMWATER DETENTION TANK TO MEET COUNCIL REQUIREMENTS

The APD RainWorx System harvests and recycles your valuable rainwater for toilets, washing clothes, watering the garden and washing your car.

With the tank installed underground, usable outdoor space is maximised and visible obstruction is removed.

Fast installation saves costly additional man hours on site, keeping the time spent in the excavation site to a minimum; making for a safer and efficient work environment.

APD can provide customised commercial packages for medium to large scale jobs: Apartment Complexes, Residential Developments etc.

RAINWORX SYSTEM PACKAGES

- Packages to suit underground or above ground tanks.
- User friendly status monitors.
- Testable back flow protector (double check valve).
- Inline filter, all fittings and bracketing.
- Isolation valves.
- Custom packages available on request.

RAINWORX PUMP KITS FOR UNDERGROUND TANKS




Internal Pipework & Pump Platform

Pre-Fitted Internal Pipework

Exclusive Design Pump Platform

Silt Trap



Pre-Assembled RainWorx Cabinet - Wall Mountable

RAINWORX PUMP KITS FOR ABOVE GROUND TANKS



Surface Mounted Pump With Cover

Pre-Assembled RainWorx Cabinet - Wall Mountable

Custom Built Above Ground Tanks

CYLINDRICAL TANKS - CUSTOM BUILT

Made to order tanks for special requirements.



INTELLIGENT DESIGN

Our designs allow quick, straight forward installation of the tank, reducing cost and the need for multiple contractors.

The tank can be easily moved to cater for future needs.

500L TO 60,000L CAPACITY

Depending upon your needs, APD's tanks can be designed and built up to at least 60,000L. Tanks can be used for detention, retention (rain harvesting), drinking water or any combination of the above.

DESIGNED TO SUIT YOU

Because APD designs and builds to order, the tank will be built to the dimensions you require, rather than standard dimensions like other suppliers. All of APD's tanks are seismically rated so you have peace of mind the tank will endure whatever is thrown its way – speak to our helpful team to find out more.

LONG LASTING

APD's tanks all have a 25 year service life and in some cases longer. The grade of material used will out perform all other tanks and won't crack, corrode or rot like other tank materials.

FIXTURES AND FITTINGS

All of APD's tanks are provided with the fittings you require for your site. This can be multiple inlets and outlets and virtually any size. Our fittings are welded to the tank and reinforced as required so there is no chance of the fittings leaking. APD's tanks are all hydrostatically tested before being delivered to ensure you have a trouble free installation.



ROBUST, SOLID DESIGN

Based on our time-proven underground detention tank designs, this robust tank has been designed using FEA analysis to comply with ARMACOP 15 load requirements for polyethylene underground storage tanks. The tank has a large capacity which reduces pump cycling and wear, providing a much greater buffer in the case of power failures or other issues. APD's design allows the maximum output of waste from the tank.

FLEXIBLE OPTIONS, STRAIGHTFORWARD **MAINTENANCE**

The type of tank we use allows flexible installation options, meaning we can choose the pump and controller to best suit your needs. Internal components are easy to remove including pump, level sensing systems and motor controls. These components combined create one of the easiest to service and maintain units on the market, freeing you up to get back to focusing on what matters - enjoying your home.

EASY INSTALLATION

With WasteWorx there is no need to worry about your tank rising out of the ground in soggy conditions thanks to the WasteWorx Anti-Buoyancy foot that comes as standard with each tank. Our unique design is a financially and environmentally friendly solution, eliminating the costly need for setting in concrete.

GET THE MOST OUT OF YOUR OUTDOOR SPACE

The tank lid is all that can be seen above ground so there are no ugly landmarks and you can utilise more of your garden area. At the same time the tanks are protected from damage from the elements.

RANGE OF PUMPS TO SUIT APPLICATION



FLEXIBILITY IN DESIGN FOR STORM WATER, GREY & BLACK WATER SYSTEMS

A pumping station from APD can provide your ideal solution, thanks to our flexible system design. We start with a range of pumps, including grinder and vortex pumps that will meet your exact flow and pressure requirements. If your design, for instance, calls for two pumps, or a specific brand of pump, no problem. The standard robust, lightweight polyethylene tank volumes are 800 and 1,200 litres, plus we can also make any size you need. Finally, we provide a pump controller, that includes a high level alarm, and built-in overload protection.

Get more flexibility when designing your pumping station, call APD on (09) 263 7741.



COMMERCIAL & CUSTOM APPLICATIONS AVAILABLE

Looking for something a little different? APD offers customised solutions too, which may include large volumes and multiple/high spec pump options. APD's tanks can be built to any size and by installing our commercial pump controllers you can accommodate complex requirements while staying in control of your building's needs. If you are building a kindergarten, office space or large commercial or community building, APD has the ideal solution for your needs.



STANDARD WASTEWORX CONTROLLER IP67

Suitable for individual households

- Automatic Start/Stop pump.
- Audible and visual alarm feedback system.
- Overload protection.

COMMERCIAL WASTEWORX CONTROLLER

Suitable for sites with multiple tanks

All standard controller features PLUS

- Review status of multiple pumps on one site.
 Frequency and duration of tanks uses.
- Control pump output.

 Allowing for times of higher and lower usage.



StormPit Type One

THE APD STORMPIT RANGE HAS IT ALL PLUS MORE!

Don't be fooled by non-compliant sumps and ensure you are complying to 'NZ Building Code E1 Surface Water' by installing the APD StormPit Type One sump today.



NZBC E1 TYPE ONE COMPLIANT SUMPS ARE REQUIRED TO HAVE

- 300mm opening.
- Maximum 1000mm height.
- 375mm diameter.
- Removable access cap for cleaning.
- A submerged or trapped outlet.
- 300mm minimum at base for silt settlement.
- Minimum 90mm outlet pipe.

APD's StormPit range offers more than just compliance to NZBC E1, we have designed additional features to benefit the installer onsite and ensure the long-term, trouble-free use.

ADDITIONAL FEATURES

- 5 tonne rated ductile iron grate fits into the main body for shallow depth installations.
- Adjustable in height from 171mm 445mm from top of outlet pipe to finished ground level.
- 274mm of height adjustment.
- 3 x Moulded inlet connections sized for 100mm PVC.
- Full 100mm sized outlet with oversized trap for greater flow.
- Anti-flotation ring.
- No threads that can bind up with gravels and fines.
- Easy to remove access cap.


StormPit 250

If larger sumps need to meet NZBC E1 then why not make sure your smaller sumps meet the same requirements.



ADDITIONAL FEATURES

- 1 tonne rated ductile iron grate fits into the main body for shallow depth installations.
- Adjustable in height from 132mm 392mm from top of outlet pipe to finished ground level.
- 260mm of height adjustment.
- 1 x Moulded inlet connection sized for 100mm PVC.
- Full 100mm sized outlet with oversized trap for greater flow.
- Anti-flotation ring.
- No threads that can bind up with gravels and fines.
- Easy to remove access cap.

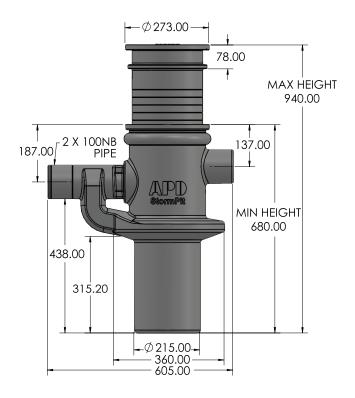

StormPit Type Two

Why use heavy, difficult concrete sumps when you can use a New Zealand building code compliant APD Type Two sump and make your job easier?




BENEFITS

- Lightweight, sump and riser are only 45kg
 an easy two person lift.
- Will fit a range of Class D 600mm opening round grates.
- Rectangular grates are also available in both flat and concave Class D.
- Anti-flotation ring, no additional concrete required.
- Made in NZ of durable recyclable polyethylene.
- Manufactured from water tank grade PE material suitable for below ground installations.




StormPit Type Two

Lightweight, and made in New Zealand from durable recyclable polyethylene, APD StormPit Type Two sumps are available with circular and rectangular (flat or concave) grates to best suit your site.

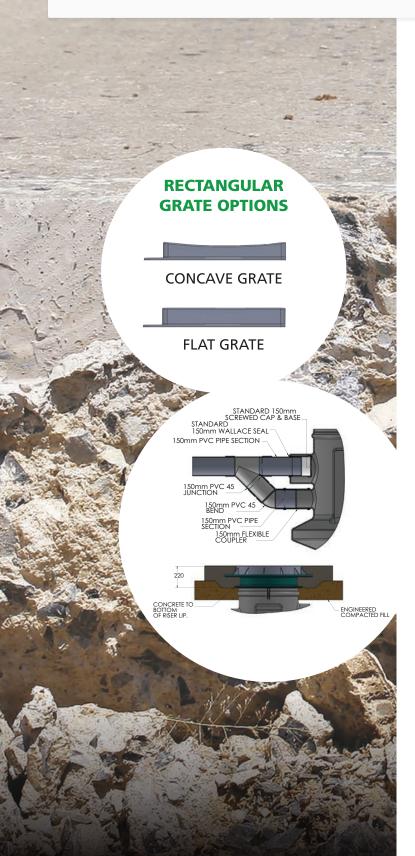

FEATURES

- Moulded in lifting eyes if required.
- Adjustable in height from 1270mm –
 1520mm from the base of the unit to FGL.
- Ability to easily install 150mm UPVC syphon with access cap.
- 1 x 250mm OD spigot, 2 x 160mm OD (150mm UPVC) spigots and 2 x flat panels for multiple inlet or outlet locations.
- Easy cutting with hole saw and use of 150mm rubber seals.
- 250mm of height adjustment.
- Easy height identification marks for cutting and drilling.

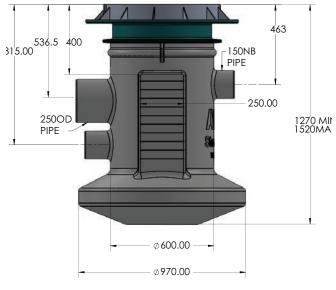

StormPit Bubble Up

THE APD StormPit BUBBLE UP MAKES YOUR JOB EASIER!


The APD StormPit Bubble Up chamber is designed to meet all the NZBC requirements, with multiple features to benefit the installer onsite and ensure long-term, trouble-free use.



ADDITIONAL FEATURES

- Adjustable in overall height from 835mm 1010mm.
- Moulded garden lid with fixings.
- 175mm of height adjustment.
- 2 x flat panels for easy installation of pipe and seals to the required height.
- 2 x 100mm wallace seals provided.
- Anti-flotation ring, no additional concrete required.
- Easy height identification marks for cutting and drilling.
- Made in NZ of durable recyclable polyethylene.
- Manufactured from water tank grade PE material suitable for below ground installations.
- Outlet can be put through the Riser section using the Wallace seal



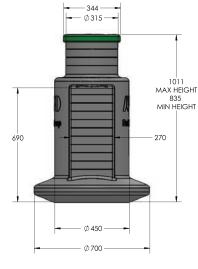

For more information contact your APD account manager or call (09) 263 7741

www.apd.co.nz