

StormPit® Type Two



The APD StormPit® Range Has Been Designed to Make Your Job Easier!

Don't be fooled by non-compliant sumps and ensure you are complying to 'NZ Building Code E1 Surface Water' by installing the APD StormPit® Type Two sump today.



Benefits

- Lightweight, sump and riser are only 45kg
 an easy two person lift.
- Will fit a range of Class D 600mm opening round grates.
- Rectangular grates are also available in both flat and concave Class D.
- Anti-flotation ring, no additional concrete required.
- Made in NZ of durable recyclable polyethylene.
- Manufactured from water tank grade PE material suitable for below ground installations.
- Producer Statement 1 is available from www.apd.co.nz








StormPit® Type Two



Lightweight, and made in New Zealand from durable recyclable polyethylene, APD's StormPit® Type Two sumps are available with circular and rectangular (flat or concave) grates to best suit your site.

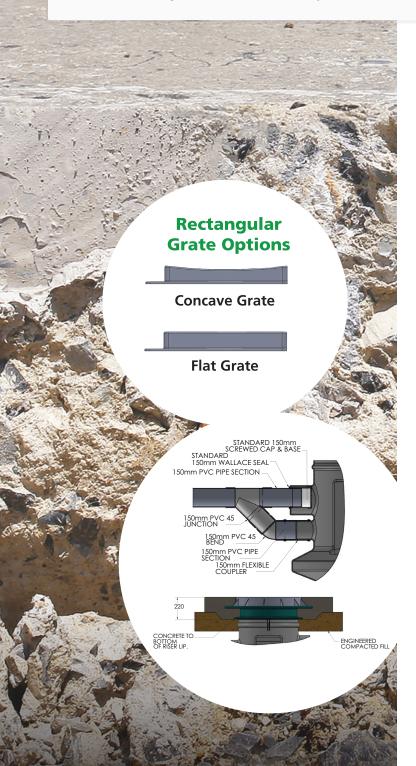

Features

- Moulded in lifting eyes if required.
- Adjustable in height from 1270mm -1520mm from the base of the unit to FGL.
- Ability to easily install 150mm UPVC syphon with access cap.
- 1 x 250mm OD spigot, 2 x 160mm OD (150mm UPVC) spigots and 2 x flat panels for multiple inlet or outlet locations.
- Easy cutting with hole saw and use of 150mm rubber seals.
- 250mm of height adjustment.
- Easy height identification marks for cutting and drilling.

